




Snap Lock 1 1/2"

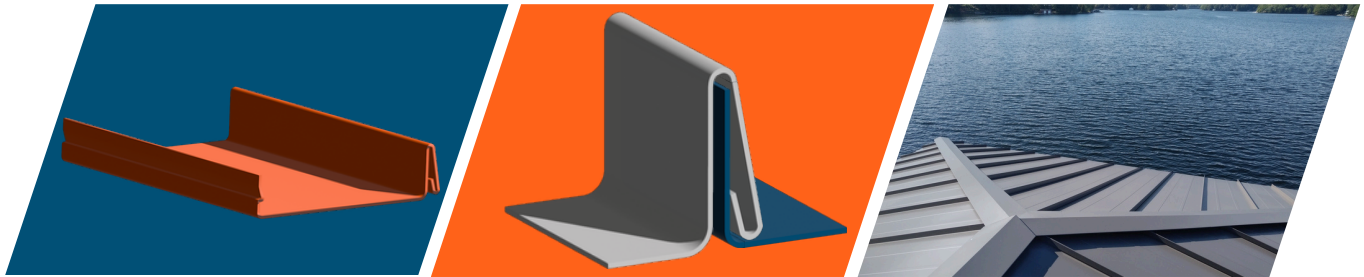

- Ultra-thin rib profile
- Superior weather-tight capability
- Hidden fasteners
- Exceptional resistance to wind uplift

- Attached to solid substrates like plywood or metal decking.
- Available expansion clip allows for thermal expansion and contraction of the panel if needed.
- One-piece clip allows for unlimited thermal movement.
- Snap together seam.
- With the right substrate, it can last up to 60 years.
- Clip relief available

Features

- It snaps together without mechanical seaming.
- 1.5" nominal seam height.
- 17" standard panel width.
- Smooth, 2 ribs, or striations.
- Minimum slope 3:12

Performance / Testing

- UL 580 Class 90 Wind Uplift Rated.
- UL 2218 Class 4 Impact Rated.
- UL 790 Class A Fire Rated.

Colors and Finishes

- 26 & 24 Ga Acrylic Coated Galvalume.
- 26 Ga SMP Color Finish.
- 24 Ga Kynar 500 Color Finish.
- 26 & 24 Ga Paint Grip.

Certifications



fasteelmrs.com

San Antonio: 210 661 2603
Metal Roof Solutions

Houston: 281 810 9546