




Standing Seam 1"

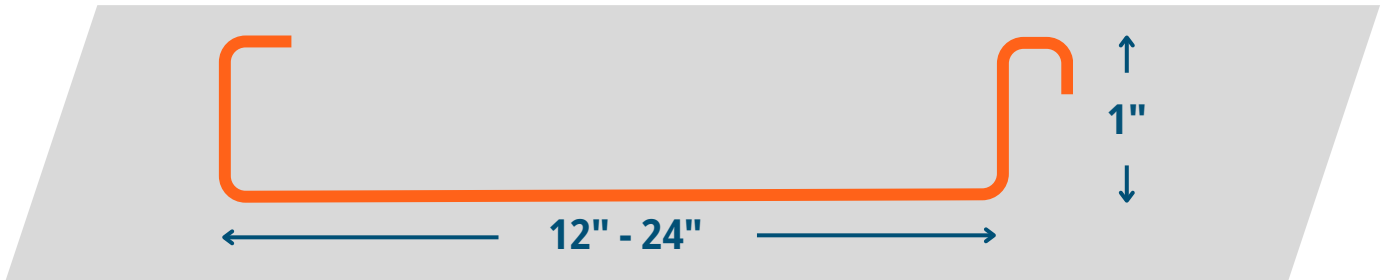

- Thin rib profile
- Superior weather-tight capability
- Hidden fasteners
- Exceptional resistance to wind uplift

- Attached to the roof deck with clips.
- Available expansion clip allows for thermal expansion and contraction of the panel if needed.
- Can curve to a 10-foot convex radius.
- With the right substrate can last up to 60 years.

Features

- Mechanically seamed.
- 1" nominal seam height.
- 18" standard panel width.
- Smooth, 2 ribs, or striations.
- Minimum slope 2:12

Performance / Testing

- UL 580 Class 90 Wind Uplift Rated.
- UL 2218 Class 4 Impact Rated.
- UL 790 Class A Fire Rated.

Colors and Finishes

- 24 Ga Acrylic Coated Galvalume.
- 24 Ga Kynar 500 Color Finish.
- 26 & 24 Ga Paint Grip.
- 16 & 20 oz. Copper.
- .032 & .040 Aluminum, Anodized or Kynar500 Color Finish.

Certifications




fasteelmrs.com

San Antonio: 210 661 2603
Metal Roof Solutions

Houston: 281 810 9546



Standing Seam 1.5"

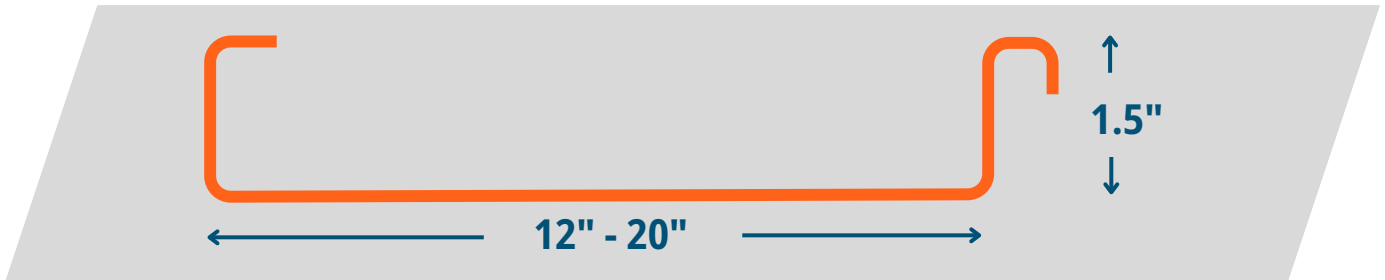

- Thin rib profile
- Superior weather-tight capability
- Hidden fasteners
- Exceptional resistance to wind uplift

- Attached to the roof deck with clips.
- Available expansion clip allows for thermal expansion and contraction of the panel if needed.
- Can curve to a 10-foot convex radius.
- With the right substrate can last up to 60 years.

Features

- Mechanically seamed.
- 1.5" nominal seam height.
- 17" standard panel width.
- Smooth, 2 ribs, or striations.
- Minimum slope 2:12

Performance / Testing

- UL 580 Class 90 Wind Uplift Rated.
- UL 2218 Class 4 Impact Rated.
- UL 790 Class A Fire Rated.

Colors and Finishes

- 24 Ga Acrylic Coated Galvalume.
- 24 Ga Kynar 500 Color Finish.
- 26 & 24 Ga Paint Grip.
- 16 & 20 oz. Copper.
- .032 & .040 Aluminum, Anodized or Kynar500 Color Finish.

Certifications




fasteelmrs.com

San Antonio: 210 661 2603
Metal Roof Solutions

Houston: 281 810 9546



Standing Seam 2"

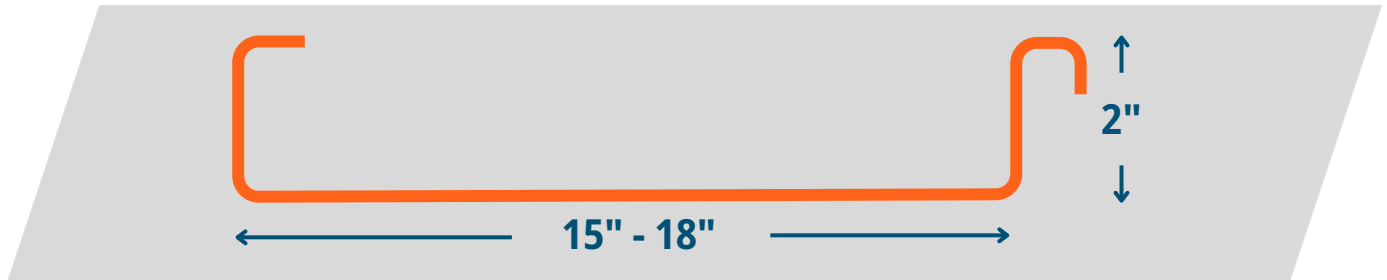

- Thin rib profile
- Superior weather-tight capability
- Hidden fasteners
- Exceptional resistance to wind uplift

- Attached to the roof deck with clips.
- Available expansion clip allows for thermal expansion and contraction of the panel if needed.
- With the right substrate can last up to 60 years.
- Ideal for warehouse applications.

Features

- Mechanically seamed.
- 2" nominal seam height.
- 18" standard panel width.
- Smooth, 2 ribs, or striations.
- Minimum slope 2:12

Colors and Finishes

- 24 & 22 Ga Acrylic Coated Galvalume.
- 24 Ga Kynar 500 Color Finish.
- 24 Ga Paint Grip.
- .032 & .040 Aluminum, Anodized or Kynar500 Color Finish.

Performance / Testing

- UL 580 Class 90 Wind Uplift Rated.
- UL 2218 Class 4 Impact Rated.
- UL 790 Class A Fire Rated.
- UL Construction #90, #180, #176, #238 A

Certifications



fasteelmrs.com

San Antonio: 210 661 2603
Metal Roof Solutions

Houston: 281 810 9546